



### E011003/E011003-DS

<b>Material</b>	Housing: Made of PC
<b>Housing Colour</b>	Black
<b>LED Colour</b>	<input type="checkbox"/> Daylight White <input type="checkbox"/> Warm White <input checked="" type="checkbox"/> Red <input checked="" type="checkbox"/> Green
<b>LED</b>	12PCS $\phi$ 5 Green/12PCS $\phi$ 5 Red
<b>LED Beam Angle</b>	90°
<b>Features</b>	Vertical mount navigation lights, Green starboard, 112.5°, Red port, 112.5°
<b>Working Voltage</b>	DC12V
<b>Wattage</b>	0.8 W (RD) / 0.8 W (GN)
<b>Effective Lumen</b>	Green: 56Lumen   Red: 19Lumen
<b>water-proofing and dust-proofing</b>	IP: 66
<b>life TEST FOR LED LAMP (1000 hours)</b>	Lumen Maintenance Percentage >90%
<b>Operation Temperature</b>	-20° ~ +45°C
<b>Certificate</b>	<div style="display: flex; justify-content: space-around; align-items: center;"> <div style="border: 1px solid black; padding: 2px;">UL</div> <div style="border: 1px solid black; padding: 2px;">CE</div> <div style="border: 1px solid black; padding: 2px;">RoHS</div> <div style="border: 1px solid black; padding: 2px;">TUV</div> </div> <div style="text-align: center; margin-top: 5px;"> <span style="display: inline-block; width: 10px; height: 10px; background-color: black; margin-right: 5px;"></span> <span style="display: inline-block; width: 10px; height: 10px; background-color: black;"></span> </div>

The light is for type "Z" attachments. The external flexible cable or cord of this luminaire cannot be replaced; if the cord is damaged, the luminaire shell will be destroyed.

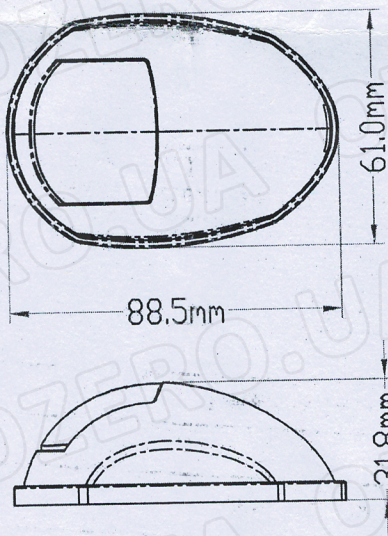

#### LIFETIME FOR LUMEN MAINTENANCE

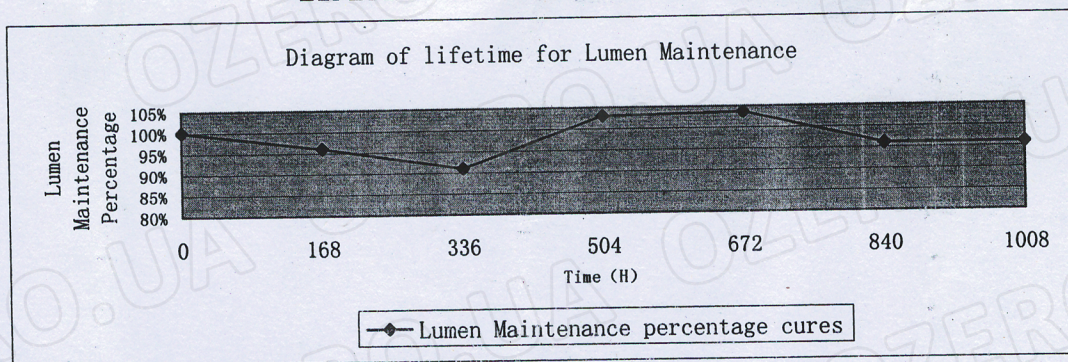

Testing Module: Lasting 1000 hrs, Temperature Range 36-40°C, Humidity: 60%RH, Input Voltage: DC12V